

# Model APL-RMB/SMB 600 Series **Low Profile Counter on Legs Radiant** or Ceramic Coal Gas Charbroiler



### **OPTIONS & ACCESSORIES (AT ADDITIONAL COST)**

	Cooking	Mode	Conversion	Kits
--	---------	------	------------	------

- ☐ Ceramic Coal mode (from RMB to SMB)
- ☐ SS Radiant mode (from SMB to RMB)
- ☐ Cast Iron Radiants
- Round Rod Top Grid
  - ☐ Fish spacing
- MagiKrome Top Grids
  - Standard spacing ☐ Fish spacing
- Scround Rod Top Grids
  - □ Fish spacing ■ Standard spacing
- 6" Cast Iron Top Grids (3 independent adjustable positions with reversible wide and thin marking)
  - Standard spacing ■ Fish spacing
- Service Shelf with towel bar
  - Low profile ■ 8" (20.3 cm)
  - □ 12" (30.5 cm) □ 10" (25.4 cm)
  - O Supply shelf without towel bar
- ☐ Pan Cutouts in Service Shelf (specify with order)
- Divider for Pan cutouts
- ☐ Cutting Boards (10" or 12" shelves only)
- ☐ Fajita Rack Inserts
- MagiGriddle (Replaces top grid)
- Safety Pilot (supervised pilot system, see gas installation requirements)
- ☐ Quick Disconnect gas hose and lanyard kit
- Back Shelf
- Slip On Covers
- ☐ Side and Back Extensions (N/A with back shelf)

Project	
Item No	
Quantity	_

#### **APPLICATION**

The Model APL-RMB/SMB 600 Series is a Low Profile counter high production charbroiler mounted on legs for space saving installation on work tables, counter or on properly insulated refrigerated / freezer bases. Many options and accessories are available to tailor your charbroiler to match your menu selection and operational needs in the kitchen. This series is also available in a High Gas Output model for higher temperatures for heavy production restaurants.

#### MODELS

□APL-SMB-6xx-x			
(Ceramic Coal Model)			
nd Gas Btu Output Rate			
Output			
l 80Kbtu/hr			
l 120Kbtu/hr			
I 140Kbtu/hr			
200Kbtu/hr			
260Kbtu/hr			
320Kbtu/hr			

#### STANDARD FEATURES & ACCESSORIES

- **APL-RMB-600** V-shaped radiant for each burner
- APL-SMB-600 Ceramic coal screen
- Free floating top grid ½" (1.3 cm) steel rods allows expansion and contraction without warping
- E-Z Tilt top grid drains grease into front trough
- Round top grid with standard spacing with guick lift handle
- Convertible Radiant design to Coal style
- Fully Insulated double walled outer cabinet
- Stainless steel on all four sides
- Suspended crumb trays & grease box with handles
- 6" (15.2 cm) stainless service shelf

- 6" (15.2 cm) stainless service shelf

  Towel bar for utensil storage

  Runner tube pilot system

  Individual front burner controls for precise regulation
- All stainless steel burners for long life
- Single 3/4" gas connection
- Burners are 15Kbtu or optional High output 20Kbtu.
- 4" adjustable legs installed (flush mount not available)
- Top Grid Scraper

#### **APPROVALS**

MEA Approved












## Model APL-RMB/SMB 600 Series Low Profile Counter on Legs Gas Charbroiler

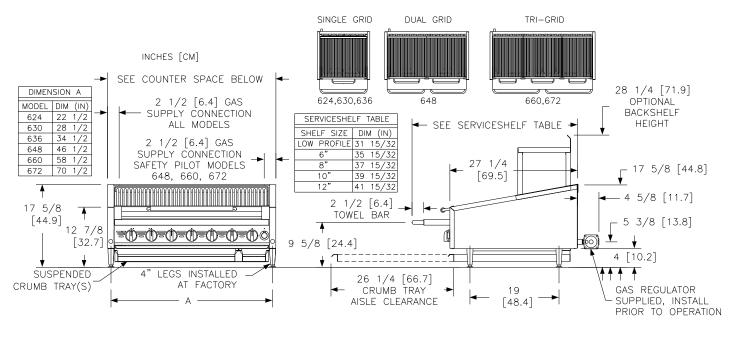

INDIVIDUAL CHARBROILER SPECIFICATIONS							
APL Size 624 / 624-I		624 / 624-H	630 / 630-H	636 / 636-H	648 / 648-H	660 / 660-H	672 / 672-H
Coo	Standard	60,000Btu	90,000Btu	105,000Btu	150,000Btu	195,000Btu	240,000Btu
Gas BTU/	Output	(17.6 kW)	(26.4 kW)	(30.8 kW)	(44.0 kW)	(57.2 kW)	(70 kW)
HR	(H) High	80,000Btu	120,000Btu	140,000Btu	200,000Btu	260,000Btu	320,000Btu
пк	Output	(23.4 kW)	(35.2 kW)	(41.0 kW)	(58.6 kW)	(76.2 kW)	(94.1kW)
Bı	urners	4	6	6 7 10		13	16
Cook	Cooking Area 513 in <sup>2</sup> (3,314 cm <sup>2</sup> )		662 in <sup>2</sup> (4,271 cm <sup>2</sup> )	810 in <sup>2</sup> (5,233 cm <sup>2</sup> ) 1107 in <sup>2</sup> (7,145 cm		1404 in <sup>2</sup> (9,063cm <sup>2</sup> )	1704 in <sup>2</sup> (11,001cm <sup>2</sup> )
Counter Space 24" x 35-1/2" (61 x 90 cm)		30" x 35-1/2" (76 x 90 cm)	36" x 35-1/2" 48 x 35-1/2" (91 x 90 cm) (122 x 90 cm)		60" x 35-1/2" (152 x 90 cm)	72" x 35-1/2" (183 x 90 cm)	
Crun	nb Trays	1 1 1 2		2	2	3	
T	Floating	1 20 3/4 x 24 3/4" (52.7 x 62.9cm)	1 26 3/4 x 24 3/4" (67.9 x 62.9 cm)	1 32 3/4 x 24 3/4" (83.2 x 62.9 cm)	2 22 3/8 x 24 3/4" (56.8 x 62.9 cm)	1 20 3/4 x 24 3/4" (52.7 x 62.9 cm)	1 24 1/8 x 24 3/4" (61.3 x 62.9 cm)
Top Grids	Steel	Floating Steel grids are standard as round rods with standard spacing, Optional are: MagiKrome Round Rods, Scround Rod with Standard spacing 5/16" ( 0.79cm) or Fish spacing 3/16" (0.48cm)				2 18 x 24 3/4" (45.7 x 62.9 cm)	2 22 3/8 x 24 3/4" (56.8 x 62.9 cm)
	Cast Iron	n 3 4 5 7		7	9	11	

Cast Iron grids are 6 1/4 x 22 5/8" (15.9 x 57.5cm), Reversible with Thick(1/4") and Thin(1/32") Marking. Cast Grids are available in Standard(13/16"), or Fish(11/16") spacing.

SHIPPING INFORMATION (Approximate)								
<b>Shipping Weight</b>	210 lbs. (95.2 kg) 280 lbs. (127 kg) 350 lbs. (159 kg) 425 lbs. (193 kg) 565 lbs. (256 kg) 705 lbs. (320 kg)							
Shipping Crate	31 x 28 x 43 "	42 x 45 x 51 "	42 x 45 x 51 "	42 x 45 x 51 "	42 x 45 x 73 "	42 x 45 x 73 "		
HxWxL	(79x71x109 cm)	(107 x114 x129 cm)	(107 x114 x129 cm)	(107 x114 x129 cm)	(107 x114 x185 cm)	(107 x114 x185 cm)		
Shipping Cube	21.6 ft <sup>3</sup> (0.6m <sup>3</sup> )	55.8 ft <sup>3</sup> (1.6m <sup>3</sup> )	55.8 ft <sup>3</sup> (1.6m <sup>3</sup> )	55.8 ft <sup>3</sup> (1.6m <sup>3</sup> )	79.8 ft <sup>3</sup> (2.3m <sup>3</sup> )	79.8 ft <sup>3</sup> (2.3m <sup>3</sup> )		

INSTALLATION INFORMATION							
GAS PRESSURE REQUIREMENTS			GAS CONNECTION REQUIREMENTS				
Natural Gas LP Gas			Models without Safety Pilots	Models with Safety Pilots			
Supply Pressure*	7 - 10" W.C. (17.4 mbars/ 1.74 kPa)	11 - 13" W.C. (27.4 mbars/ 2.74 kPa)	(1) 3/4" Gas Regulator shipped unattached , (1) 3/4" NPT supply pipe	624, 630, 636 (1) 1/2" to 3/4" adaptor & (1) 3/4" Gas Regulator	<b>648, 660, 672</b> (2) 1/2" to 3/4" adaptor & (2) 3/4" Gas Regulator		
Burner	4" W.C.	10" W.C.	connection	shipped unattached , (1) 1/2" NPT supply pipe	shipped unattached , (2) 1/2" NPT supply pipe		
Pressure	(10 mbars / 1 kPa)	(25 mbars / 2.4 kPa)	Gas Regulator MUST be ins	talled to broiler gas supply prio	r to connecting gas line.		

\* Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on

CLEARANCES (Can Not Be Flush Mounted)							
Front min	Floor min.	Combustik	ole material	Non-Combust	ible material	Charbroiler Flue area	
30"	4"	Sides min.	Rear min.	Sides min.	Rear min.	Do not block / restrict flue gases from flowing into hood or	
(76.2 cm)	(10.2 cm)	6" (15.2 cm)	8" (20.3 cm)	0"	8" (20.3 cm)	install vent hood drains over the flue.	
SHORT FORM SPECIFICATION							

Provide MagiKitch'n model APL- RMB 6xx radiant or APL-SMB 6xx ceramic coal low profile counter on legs charbroiler. Unit shall be gas heated and shall cook by means of gas burners. Unit shall be double-walled stainless steel construction, and fully insulated on all sides. Provide with independent gas burners. Individual burner controls shall be mounted every 4 to 4-1/2 inches for flexible use. Convertible design allows operator to quickly change from