

Job: _____

Item: _____

Quantity: _____

Enclosed Pan Racks

Clean, High Volume Storage Cabinet

Ideal cabinet for food delivery and storage. Formed door and rear panel create a chimney effect allowing air to circulate freely from top to bottom. Solid side panels are composed of interlocking aluminum extrusions with guides spaced on 1½” centers for maximum capacity. Units are secured with heavy duty tie rods of 7/8” square tube.

Easy to Maneuver

Equipped with four 5” or 6” platform swivel type heavy duty casters with non-marking wheels, these all welded aluminum carts can be loaded up and easily rolled into place.

Sanitary

Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface. No cracks or crevices to trap dirt!

Guaranteed Dependable

All units carry a Lifetime Guarantee against rust and corrosion as well as a Five-Year Guarantee against material defects and workmanship.

NSF Certified.



#1290



#1290PP

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.



Distributed by:

Job: _____

Item: _____

Quantity: _____

Enclosed Pan Racks

CONSTRUCTION: Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy.

UPPER FRAME & TOP: The upper frame is constructed of vertical uprights 1" x 2½" x ⅛" thick extruded aluminum channels with top cross and side bracing of 1¼" x ½" x ⅛" wall extruded aluminum channel, all fully welded together. A solid cap of .063" thick aluminum is welded to uprights and cross bracing.

COMPOUND GUIDES: The compound guides are interlocking solid wall type, extruded aluminum panels. Each panel has a series of guides spaced 1½" on center, with ½" ledges and .090" wall thickness. The guides are welded to the vertical uprights.

REAR PANEL: Rear panel is .080" thick aluminum panel with a corrugation on each side for strength and enhanced air circulation. Panel is welded to the top, bottom, and rear vertical uprights.


DOOR: Door consists of ⅛" thick aluminum panel with a corrugation on each side. The door is supported by three stainless steel hinges designed to provide 270° door swing. **A positive gravity catch is provided to retain door in a closed position.** A universal card holder is bolted to the upper front of the door.

TIE ROD: A ⅞" square wall extruded aluminum tube tie rod is welded to the front vertical uprights for extra rigidity. **Model #1291 uses two tie rods, one at each end.**

BOTTOM FRAME: Bottom frame is constructed of ⅛" thick aluminum sheet with four sides bent down 1⅜", all corners welded smoothly. Tubular framework welded inside the ⅛" aluminum sheet for extra rigidity. Caster plates (2¾" x 4" thick pre-tapped) are welded to bottom of frame.

CASTERS: Four platform type 5" or 6" casters, full swivel design with sealed ball bearing axle and non-marking wheels.

NSF Certified.

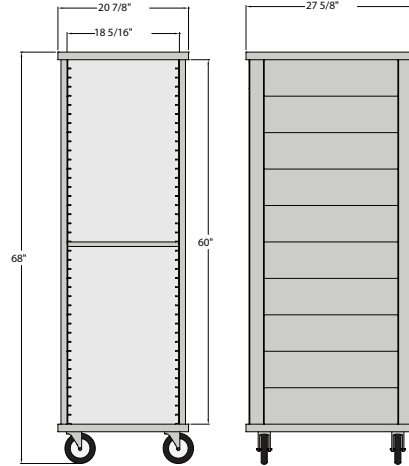

Model No.	Size W-H-D	Casters	Pan Cap.	H.D. Base	Ship Wt.
½-SIZE ENCLOSED PAN RACK — 1-½" Runner Spacing					
1296	20⅞" x 38" x 27⅝"	5" (#C450)	20	No	72#
¾-SIZE ENCLOSED PAN RACK — 1-½" Runner Spacing					
1293	20⅞" x 56" x 27⅝"	5" (#C450)	32	Yes	106#
FULL SIZE ENCLOSED PAN RACK — 1-½" Runner Spacing					
1290	20⅞" x 68" x 27⅝"	5" (#C450)	40	Yes	113#
1292*	20⅞" x 69" x 27⅝"	6" (#C510)	38	Yes	137#
SOLID SIDES, OPEN ENDS, SOLID TOP & BOTTOM — 1-½" Spacing					
1291	20⅞" x 68" x 27⅝"	5" (#C450)	40	Yes	79#
SOLID SIDES, OPEN ENDS, TOP, & BOTTOM — 1-½" Runner Spacing					
96328	20⅞" x 69⅓" x 26½"	5" (#C450)	39	N/A	65#

Castors:
 #C450 = 5" x 1⅞" polyurethane platform type swivel caster.
 #C510 = 6" x 2" polyolefin platform type swivel caster.

* Equipped With A Reinforced Door — Standard
 Units hold 13" x 18", 14" x 18", and 18" x 26" pans by the lip.

- OPTIONS:**
- "B", "MD" (excluding #1292), "PB", "CL(B)", "CL(C)" -- See price list for details.
 - Clear Polycarbonate Door** - Add "CD" suffix to model #.
 - Open Door Latch** - Add "DL" suffix to model #.
 - Reinforced Door** - Add "RD" suffix to model #
 - Note: #1292 comes equipped with a reinforced door - standard.
 - Prison Package** - Add "PP(B)" suffix to model # (#1290, #1293, & #1296 only).
 - (4) Welded Hinges
 - (+ Extra Interior Bracing
 - (4) 6" Casters (#C510)
 - (+ Tamper-Proof Screws & Bolts
 - (2) Padlock Holes In Door
 - *** 38 Pan Capacity ***

Distributed by:

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

