Item number: 60.7X.XX

Variants

- 60.74.159: UltraVent XS 6 2/3 E
- 60.73.945: Combi-Duo adapter kit UltraVent XS 6 2/3 E
- 60.74.254: UltraVent XS 6 2/3 E + Combi-Duo adapter kit UltraVent XS 6 2/3 E

Description

• The condensation technology in UltraVent absorbs and dissipates steam in the form of condensate. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

Technical Information

- Ratings: 125V 1 NAC 60 HZ
- Connected load: 215 W
- Extraction power: 9,900 20,000 ft³/h
- · Operating noise level: 70 dBA
- Width: 25 7/8" (657 mm)
- Height: 9 1/2" (240mm)
- Depth: 22 3/4" (580 mm)
- Weight: 66 lbs (30kg)
- · Certifications: VDE, NSF, UL

Equipment


- · High extraction power
- Proximity door contact switch
- · Automatic increase of extraction power when cooking chamber door is opened
- · Waste water discharge through the unit, no additional discharge required

Material

· Stainless steel grids

Note


- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent XS condensation hood can be used for right and left hand door units. Supplied with installation options for both variants.



We reserve the right to make technical improvements

Specification/Data sheet UltraVent XS 6 2/3 E



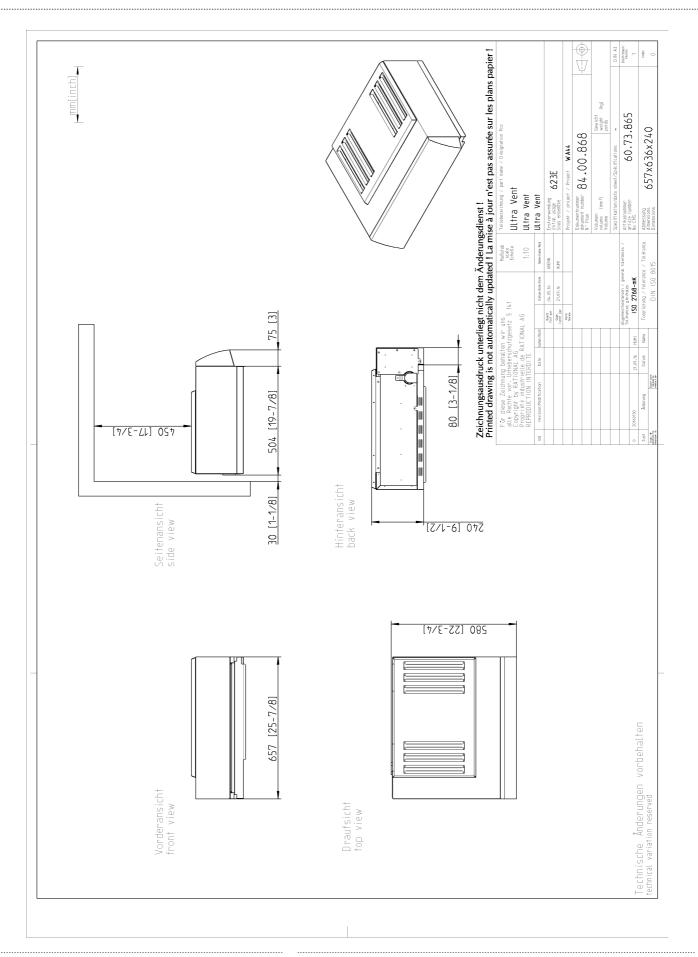

RATIONAL USA Inc. 1701 Golf Road, Suite C-120, Commercium Rolling Meadows, IL 60008 Tel.: 888-320-7274 Fax.: 847-755-9583 Visit us on the internet: www.rationalusa.com

We reserve the right to make technical improvements