

Model

eikon[™] e6

eб

Project:	
Item:	

Quantity:

Approval: Date:



Standard Features

- Advanced Cooking Technology^{*} with planar plume, radiant and microwave technologies for faster, even heating and browning
- "Ventless^{*} Cooking" capabilities through built-in catalytic converter with full protein capabilities
- Ability to use a standard metal baking pan while in convection/microwave mode
- Automatic voltage detection (U.S. only)
- Up to ten (10) times faster than conventional cooking methods
- Power management system keeps power below 30 amps.
- Quiet operation maximum noise level of 65 dBA in idle mode

*Local codes prevail. These are the "authority having jurisdiction" as stated by the National Fire Protection Association, Inc., in NFPA96-1994.


Specifications

Construction


- 430 stainless steel casework and 304 stainless steel interior cavity
- Easily removable and cleanable grease and cooling air filters

EasyToUCH[™] Control Panel

- Icon driven, color touch screen control panel with the capability of storing up to 1,024 multi-stage recipe programs
- Each program offers up to six (6) stages with programmable cooking times, microwave power settings and user instructions for each stage
- · Self diagnostics capability to monitor components
- Easy menu updates or data transfer via USB memory stick
- Multi-languages available



The e6 utilizes a new and patented heat transfer method called "planar plumes". Heated air is directed into planes which collide above the food surface and are then drawn around the food.

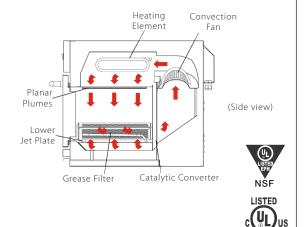

Merrychef U.S.A 1111 N. Hadley Rd. Ft. Wayne, IN 46804 Tel: 888.417.5462 Fax: 800.285-9511 E-Mail: info@merrychefusa.com

www.merrychefusa.com





∽ Merrychef

eikon ™

Width	24.4"	619.76 mm	
Depth (overall with handle)	30.9″	784.86 mm	
Depth (door open 90 degrees)	41″	1041.4 mm	
Weight	210 lbs.	95 kg	
Oven Cavity Dimensions			
Height	10″	254 mm	
Width	14.4″	365.7 mm	
Depth	14.3″	363.2 mm	
Wall Clearance			
Тор	2″	50.8 mm	
Sides	2″	50.8 mm	
Electrical Specifications		Radiant	
Phase		1ph	
Voltage	208/240		
Frequency	60Hz		
Amperage Requirement		30 Amp	
Cord Length	6'		
Max Power Rate	5750W		
Power Output (Microwave)	2000W		
Power Output (Heater)		4050W	
Plug	5 • 		
		NEMA 6-30P	

Specifications	
Control System	easyToUCH [™] , iconic symbol touch screen control panel
Cooking Stages	6
Total Cooking Programs	1024
Maximum Cooking Time	60 Min
Defrost	No
Microwave Distribution System	Rotating Active Antennae
Magnetron(s)	1
Display	LCD Backlit
Interior Light	No
Automatic Voltage Sensor	Yes
USB & Menu Updates Software	Yes
Temperature Range	212-527°F (100-275°C)
Temperature Increments	1°F
Air Filter	Yes - Air & grease
Fan Speed	10%-100%
Fan Speed Increments	1%
Microwave Power	0-100%
Microwave Power Increments	1%
Rack Option	No
Turntable	No
Stackable	No
Warranty	1 year parts and labor
Accessories in Box	
Operator Manual/Cleaning Instructions	1 Unit
Bottle Cleaner	1 Unit
Bottle Guard	1 Unit
Trigger Sprays	2 Units
Cool Down Tray	1 Unit
USB Menu Key	1 Unit

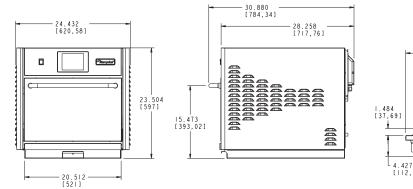



For further information on *Merrychef* products and service or advice on which machine suits you best please contact your sales representative or visit our website at www.merrychefusa.com.

Merrychef U.S.A 1111 N. Hadley Rd. Ft. Wayne, IN 46804 Tel: 888.417.5462 Fax: 800.285-9511 E-Mail: info@merrychefusa.com

www.merrychefusa.com © 2012 Merrychef U.S.A. 12/12

