

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

ST SCHOOL MILK COOLERS

ST49N Dual Access, Cold Wall

MODELS: ST49N-1-W-02

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty CABINET CONSTRUCTION White coated steel exterior and stainless steel interior

Lids, doors, adjustable hinges and door latches made from



ST49N -1-W-02

- Full electronic Control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers

stainless steel are standard on all units

- Exterior thermometer
- Cylinder lock
- Dual access, cold wall milk coolers are designed to hold milk between 36°F to 38°F until ready to serve.
- Units are not designed for overnight storage of milk

OPTIONS & ACCESSORIES

- Stainless steel exterior
- Wrap around & corner bumpers
- Graphics

REFRIGERATION SYSTEM

- Refrigeration system uses R404A refrigerant to comply with all environmental concerns
- Automatic non-electric defrost
- Epoxy coated evaporator coil


















MODEL	ST49N-1-W-02
EXTERNAL DIMENSIONAL DATA	
Width Overall	49"
Depth Overall	31 1/4"
Depth Overall with Lids/Doors Extended	61"
Height Overall with Casters	41 1/8"
Number of Lids/Doors	4
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	20
Internal Width Overall (in)	46"
Internal Depth Overall (in)	27"
Internal Height Overall (in)	25 1/2"
CASE CAPACITIES	
13" x 13" x 11"	12
19" x 13" x 11"	8
ELECTRICAL DATA	
Full Load Amperes 115/60/1	7.5
REFRIGERATION DATA	
Horsepower	1/4
WEIGHT DATA	
Gross Weight (Crated lbs)	335 lbs
Height - Crated	47"
Width - Crated	52"
Depth - Crated	34"

Note: Unit is not meant for overnight storage.

ST Series—School Milk Cooler

Models: ST49N-1-W-02

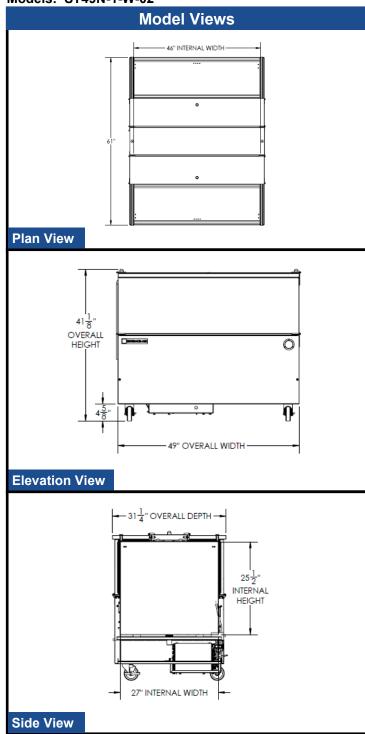

ELECTRICAL CONNECTION



115/60/1

Units pre-wired at factory and include 8' long cord and plug set.















